

MANUFACTURER

Stella Rooflight - 01794 745445
www.stellarooflight.co.uk
Ref: Bespoke Steel Framed Rooflight



TYPE

Pitched roof between
17 and 70 degrees



FRAME - 316L Stainless steel

Flashing: Lead - code to suit
application

Finish: Polyester powder coat in
C5 marine application


Colour: RAL colour TBC by
Architect

Opening: Manual brass screw
thread to 250mm opening for
ventilation (subject to size).
Electric cill mounted chain drives
up to 600mm for ventilation.
Optional switching/remote, rain
sensor, wind sensor, control panel.



THERMAL PERFORMANCE

(U-Value): 1.1 W/m²K – 1.6 W/m²K
whole unit value achievable
subject to design requirements.
Performance tested to BS EN ISO
10077-1:2017

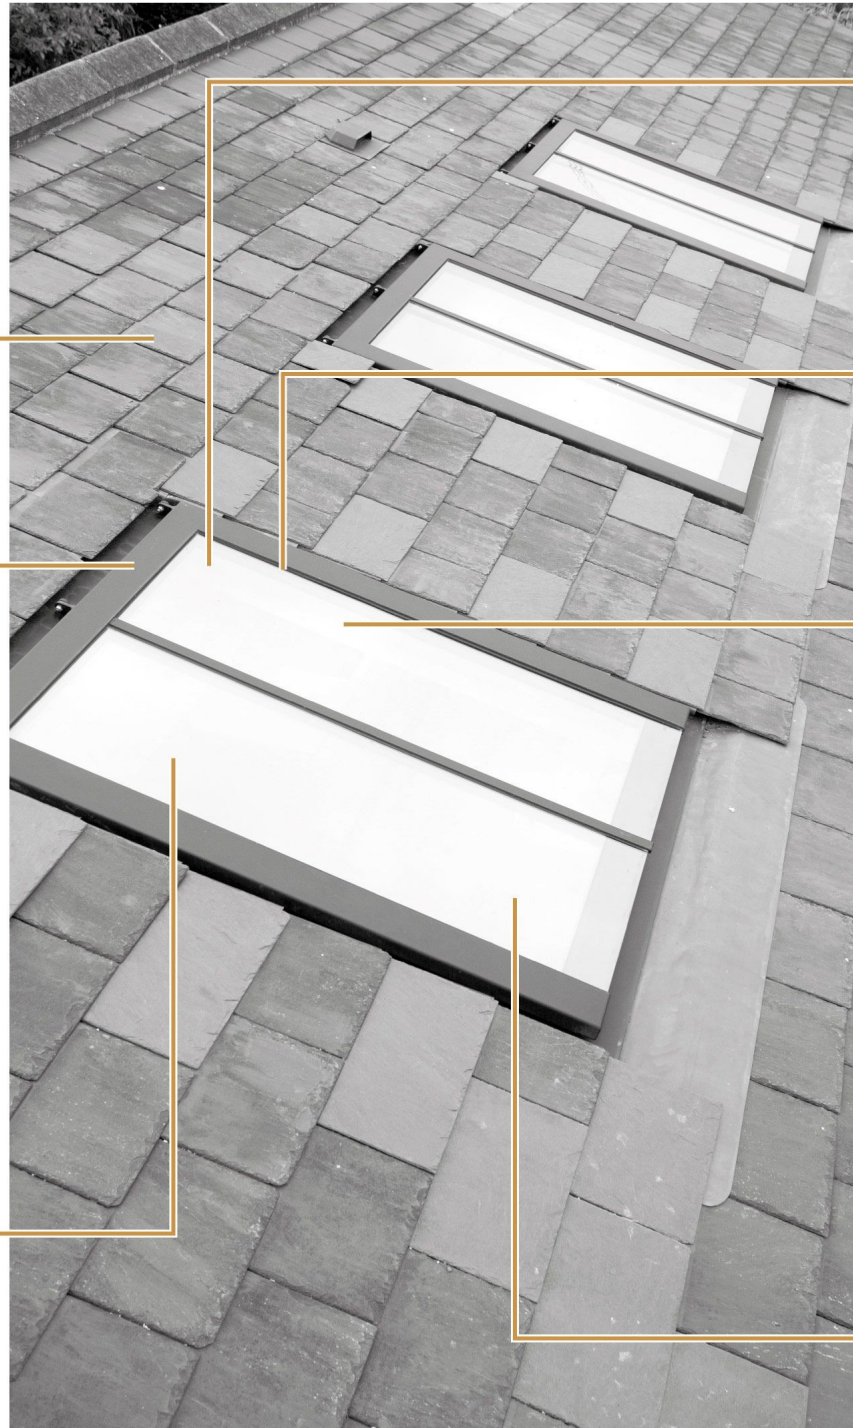

INTERIOR LINING

American ash with neutral oil
protective coating as standard.
Other hardwood options and
paint finishes available



INTEGRITY

Wind & weather performance to
harmonised standard BS EN
14351-1:2006 + A1:2010



GLAZING DETAILS:

Double or triple glazed.
Outer: Toughened BioClean
Natura, self-clean & solar control
Spacer: Black, warm edge, silicone
sealed
Inner: Toughened Planitherm One
Low E
Thickness: Subject to sizing
Genuine glazing Bars: Optional
Fitting: 4mm double sided
security glazing tape (4mm)
Beading: Specialist silicone
suitable for use with Bio-Clean,
self-clean glass. Black as standard



ACCESSORIES:

Range of manual or electric
pleated blackout blinds